



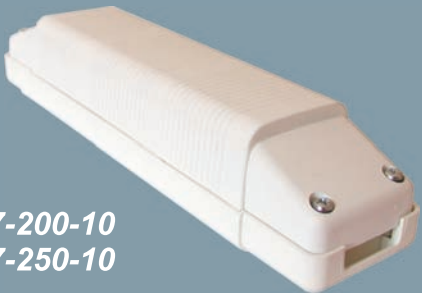
equiv

SELV

37-105-10

37-035-10
37-060-30
37-060-50
37-105-3037-070-20
37-105-20
37-120-20
37-120-21

37-150-10

37-200-10
37-250-1037-070-40
37-105-40

Elektronische Transformatoren [electronic transformers]

Art.-Nr. [Art.-No.]	prim.	sek.	Leistung [rated power]	Maße [size] (LxBxH)
37-105-10	230V/50-60Hz	11,5V	20 - 105 VA	111x39x28mm

Art.-Nr. [Art.-No.]	prim.	sek.	Leistung [rated power]	Maße [size] (LxBxH)
37-035-10	230V/50-60Hz	11,5V	10 - 35 VA	76x36x19mm
prim. + sek. mit 200 mm Leitung [prim. + sec. with 200 mm cable]				
37-060-30	230V/50-60Hz	11,5V	20 - 60 VA	112x33x21mm
37-060-50	230V/50-60Hz	11,5V	20 - 60 VA	95x31x21mm
37-105-30	230V/50-60Hz	11,5V	20 - 105 VA	112x33x21mm

Art.-Nr. [Art.-No.]	prim.	sek.	Leistung [rated power]	Maße [size] (LxBxH)
37-070-20	230V/50-60Hz	11,5V	20 - 70 VA	140x56x19mm
37-105-20	230V/50-60Hz	11,5V	35 - 105 VA	140x56x19mm
37-120-20	230V/50-60Hz	11,5V	20 - 120 VA	196x45x19mm
37-120-21	230V/50-60Hz	11,5V	20 - 120 VA	196x45x19mm
sek. AMP 6-fach-Verteiler [sec. AMP connector] 6 x 20 W				

Art.-Nr. [Art.-No.]	prim.	sek.	Leistung [rated power]	Maße [size] (LxBxH)
37-150-10	230V/50-60Hz	11,5V	75 - 150 VA	164x46x35mm

Art.-Nr. [Art.-No.]	prim.	sek.	Leistung [rated power]	Maße [size] (LxBxH)
37-200-10	230V/50-60Hz	11,5V	100-200 VA	220x54x45mm
37-250-10	230V/50-60Hz	11,5V	100-250 VA	220x54x45mm

Art.-Nr. [Art.-No.]	prim.	sek.	Leistung [rated power]	Maße [size] (LxBxH)
37-070-40	230V/50-60Hz	11,5V	20 - 70 VA	Ø 53x22mm
prim. + sek. mit 200 mm Leitung [prim. + sec. with 200 mm cable]				
37-105-40	230V/50-60Hz	11,5V	35 - 105 VA	Ø 70x22mm
prim. + sek. mit 200 mm Leitung [prim. + sec. with 200 mm cable]				

Alle Transformatoren sind mit Phasenabschrittdimmer dimmbar [all transformers are dimmable with "trailing-edge"-dimmer] (IGBT).